

DM 081

S-DIAS Digital Mixed Module

Operating Manual

Publisher: SIGMATEK GmbH & Co KG
A-5112 Lamprechtshausen
Tel.: +43/6274/4321
Fax: +43/6274/4321-18
Email: office@sigmatek.at
WWW.SIGMATEK-AUTOMATION.COM

Copyright © 2014
SIGMATEK GmbH & Co KG

Translation from German

All rights reserved. No part of this work may be reproduced, edited using an electronic system, duplicated or distributed in any form (print, photocopy, microfilm or in any other process) without the express permission.

We reserve the right to make changes in the content without notice. The SIGMATEK GmbH & Co KG is not responsible for technical or printing errors in the handbook and assumes no responsibility for damages that occur through use of this handbook.

S-DIAS Digital Mixed Module

DM 081

with **4 digital inputs**

4 short-circuit proof digital outputs

The S-DIAS DM 081 digital mixed module has four digital inputs (+24 V/3.7 mA/5 ms) and four short-circuit proof digital outputs (+24 V/0.5 A). The supply voltage is monitored for under voltage.



Contents

| | | |
|----------|--|-----------|
| 1 | Technical Data | 4 |
| 1.1 | Digital Input Specifications..... | 4 |
| 1.2 | Digital Output Specifications..... | 4 |
| 1.3 | Electrical Requirements..... | 5 |
| 1.4 | Voltage Monitor..... | 7 |
| 1.5 | Miscellaneous | 7 |
| 1.6 | Environmental Conditions | 7 |
| 2 | Mechanical Dimensions | 8 |
| 3 | Connector Layout | 9 |
| 3.1 | Status LEDs..... | 10 |
| 3.2 | Applicable Connectors..... | 10 |
| 3.3 | Label Field | 11 |
| 4 | Wiring..... | 12 |
| 4.1 | Wiring Example..... | 12 |
| 4.2 | Note..... | 13 |
| 4.2.1 | Connecting inductive loads: | 13 |
| 5 | Mounting..... | 14 |
| 6 | Addressing..... | 16 |
| 7 | Supported Cycle Times..... | 17 |
| 7.1 | Cycle Times below 1 ms (in μ s)..... | 17 |

| | | |
|----------|---|-----------|
| 7.2 | Cycle Times equal to or higher than 1 ms (in ms)..... | 17 |
| 8 | Hardware Class DM081 | 18 |
| 8.1 | Interfaces | 19 |
| 8.1.1 | Clients | 19 |
| 8.1.2 | Servers..... | 19 |
| 8.1.3 | Communication Interfaces..... | 19 |
| 8.2 | Example | 20 |

1 Technical Data

1.1 Digital Input Specifications


| | | |
|---|-----------------|---------------|
| Number | 4 | |
| Input voltage | typically +24 V | maximum +30 V |
| Signal level (up to HW version 3.00) | low: < +8 V | high: > +14 V |
| Signal level (starting with HW version 3.10) | low: < +5 V | high: > +15 V |
| Input current | 3.7 mA at +24 V | |
| Input delay | typically 5 ms | |

1.2 Digital Output Specifications

| | | |
|--|--|--|
| Number | 4 | |
| Short-circuit proof | yes | |
| Maximum continuous current load allowed per channel | 0.5 A | |
| Maximum total current (all 4 outputs) | 2 A (100 % of on time) | |
| Maximum braking energy of outputs (inductive load) | maximum 1 Joule/channel | |
| Residual current (off) | ≤ 10 μA | |
| Turn-on delay | < 100 μs (up to HW version 4.XX) < 200 μs (starting with HW version 5.00) | |
| Turn-off delay | < 150 μs (up to HW version 4.XX) < 200 μs (starting with HW version 5.00) | |

1.3 Electrical Requirements

| | | |
|---|--|---------------|
| Power supply +24 V | 18-30 V DC | |
| Current consumption of the +24 V supply | corresponds to the load on the digital outputs | |
| Voltage supply from S-DIAS bus | +5 V | |
| Current consumption on the S-DIAS bus (+5 V supply) | typically 45 mA | maximum 50 mA |

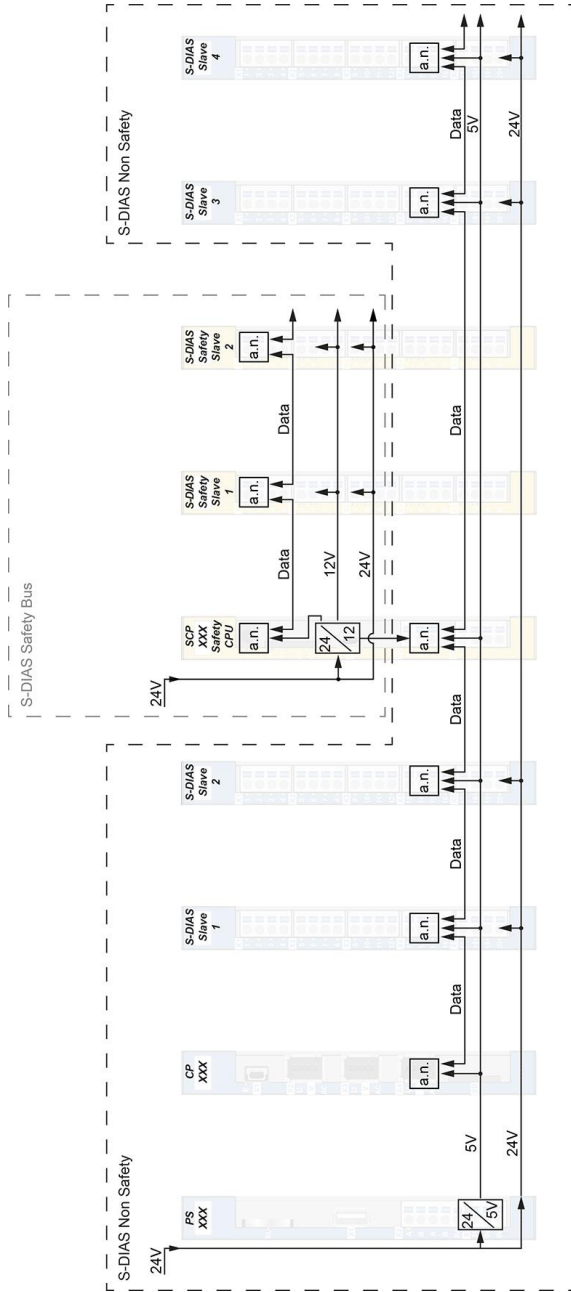

Wiring S-DIAS Safety in S-DIAS System

- each S-DIAS module is an active module (active node)
- Safety CPU is connected to the S-DIAS bus (incl. +5V supply)
- Safety bus is independent and separated from the S-DIAS bus

1.4 Voltage Monitor

| | |
|--------------------|--|
| Power supply +24 V | supply voltage > 18 V (DC OK-LED lights green) |
|--------------------|--|


1.5 Miscellaneous

| | |
|------------------|------------------|
| Article number | 20-008-081 |
| Hardware version | 1.x-5.x |
| Standard | UL 508 (E247993) |
| Approbations | UL, cUL, CE |


1.6 Environmental Conditions

| | | |
|---------------------------------------|--|---|
| Storage temperature | -20 ... +85 °C | |
| Environmental temperature | 0 ... +60 °C | |
| Humidity | 0-95 %, non-condensing | |
| Installation altitude above sea level | 0-2000 m without derating > 2000 m with derating of the maximum environmental temperature by 0.5 °C per 100 m | |
| Operating conditions | Pollution degree 2 | |
| EMC resistance | in accordance with EN 61000-6-2 (industrial area) | |
| EMC noise generation | in accordance with EN 61000-6-4 (industrial area) | |
| Vibration resistance | EN 60068-2-6 | 3.5 mm from 5-8.4 Hz 1 g from 8.4-150 Hz |
| Shock resistance | EN 60068-2-27 | 15 g |
| Protection type | EN 60529 | IP20 |

2 Mechanical Dimensions

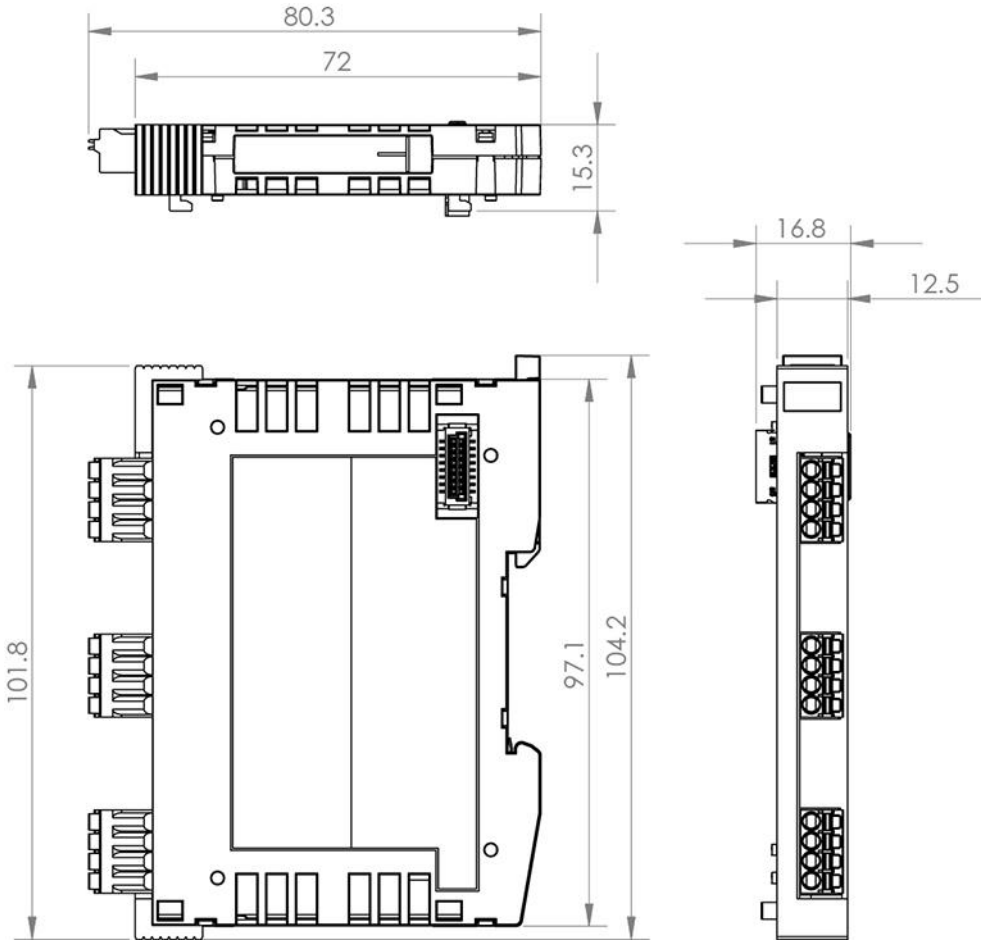

3 Connector Layout

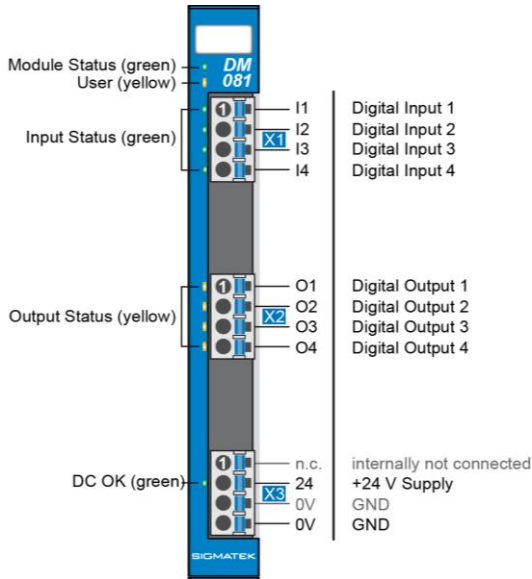

The pins 3 & 4 of the connector X3 are bridged within the module. For the GND supply of the module only the connection of pin 4 is necessary. The internally bridged connections may be used for further looping of the GND supply. However, it must be taken into account that a total current of 6 A per connection is not exceeded as a result of further looping!

3.1 Status LEDs

| | | | |
|---------------|--------|-----------------|---|
| Module Status | green | ON | module active |
| | | OFF | no supply available |
| | | BLINKING (5 Hz) | no communication |
| User | yellow | ON | can be set from the application (e.g. the module LED can be set to blinking through the visualization so that the module is easily found in the control cabinet) |
| | | OFF | |
| | | BLINKING (2 Hz) | |
| | | BLINKING (4 Hz) | |
| Input Status | green | ON | input ON |
| | | OFF | input OFF |
| Output status | yellow | ON | output on |
| | | OFF | output off |
| DC OK | green | ON | voltage is supplied to the output group |

3.2 Applicable Connectors

Connectors:

X1-X3: Connectors with spring terminals (included in delivery)

The spring terminals are suitable connecting ultrasonically compacted (ultrasonically welded) strands.


Connections:

| | |
|--|---|
| Stripping length/Sleeve length: | 10 mm |
| Plug-in direction: | parallel to conductor axis or to PCB |
| Conductor cross section, rigid: | 0.2-1.5 mm ² |
| Conductor cross section, flexible: | 0.2-1.5 mm ² |
| Conductor cross section, ultrasonically compacted: | 0.2-1.5 mm ² |
| Conductor cross section AWG/kcmil: | 24-16 |
| Conductor cross section flexible, with ferrule without plastic sleeve: | 0.25-1.5 mm ² |
| Conductor cross section flexible, with ferrule with plastic sleeve: | 0.25-0.75 mm ² (ground for reducing d2 of the ferrule) |



$d_2 = \text{max. } 2.8 \text{ mm}$


3.3 Label Field



| | |
|---------------------------|------------------------|
| Manufacturer | Weidmüller |
| Type | MF 10/5 CABUR MC NE WS |
| Weidmüller article number | 1854510000 |
| | |
| Compatible printer | Weidmüller |
| Type | Printjet Advanced 230V |
| Weidmüller article number | 1324380000 |

4 Wiring

4.1 Wiring Example

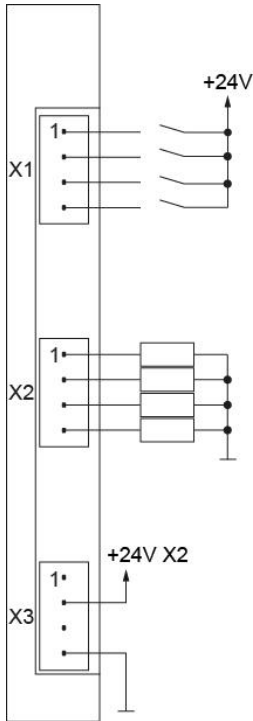

4.2 Note


- Up to 4 outputs are powered by a common +24 V supply.
- The cross section of the conductor for the +24 supply must be sufficient for the maximum total current.
- The outputs and can be turned off by turning off the +24 V supply voltage.
- Applying power to an output whose supply voltage exceeds 0.7 V is not allowed.

Inductive loads must always be connected to a freewheeling diode or an RC network. This should be placed as close to the load as possible.

**IMPORTANT:
The S-DIAS module CANNOT be connected or disconnected while voltage is applied!**


**IMPORTANT:
Le module S-Dias NE PEUT PAS être inséré ou retiré sous tension.**

4.2.1 Connecting inductive loads:

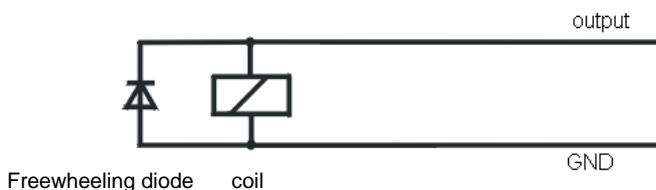


5 Mounting

The S-DIAS modules are designed for installation into the control cabinet. To mount the modules a DIN-rail is required. The DIN rail must establish a conductive connection with the back wall of the control cabinet. The individual S-DIAS modules are mounted on the DIN rail as a block and secured with latches. The functional ground connection from the module to the DIN rail is made via the grounding clamp on the back of the S-DIAS modules. The modules must be mounted horizontally (module label up) with sufficient clearance between the ventilation slots of the S-DIAS module blocks and nearby components and/or the control cabinet wall. This is necessary for optimal cooling and air circulation, so that proper function up to the maximum operating temperature is ensured.

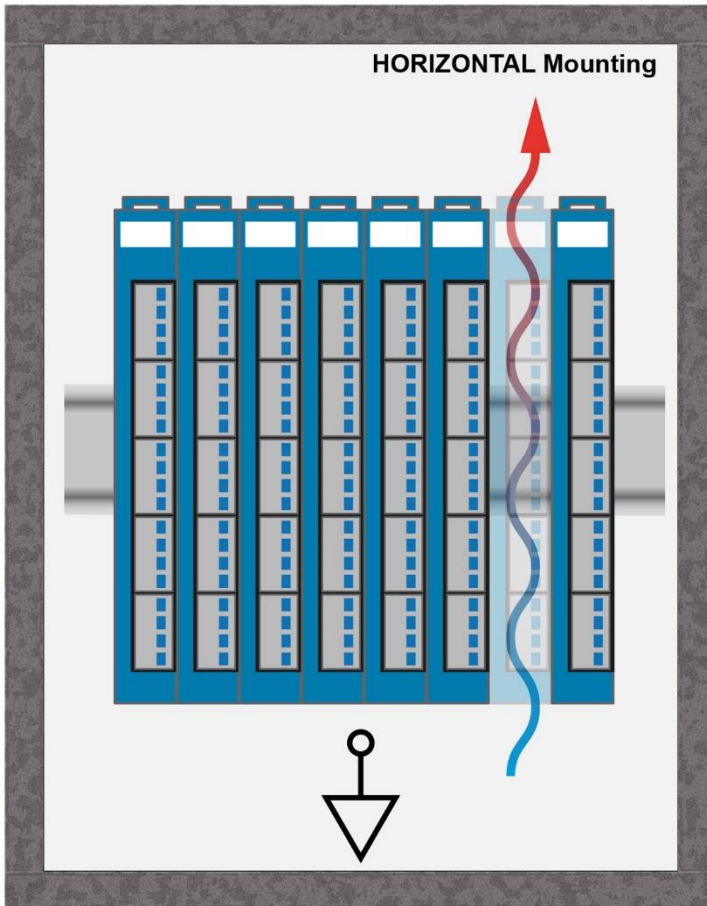

Recommended minimum distances of the S-DIAS modules to the surrounding components or control cabinet wall:

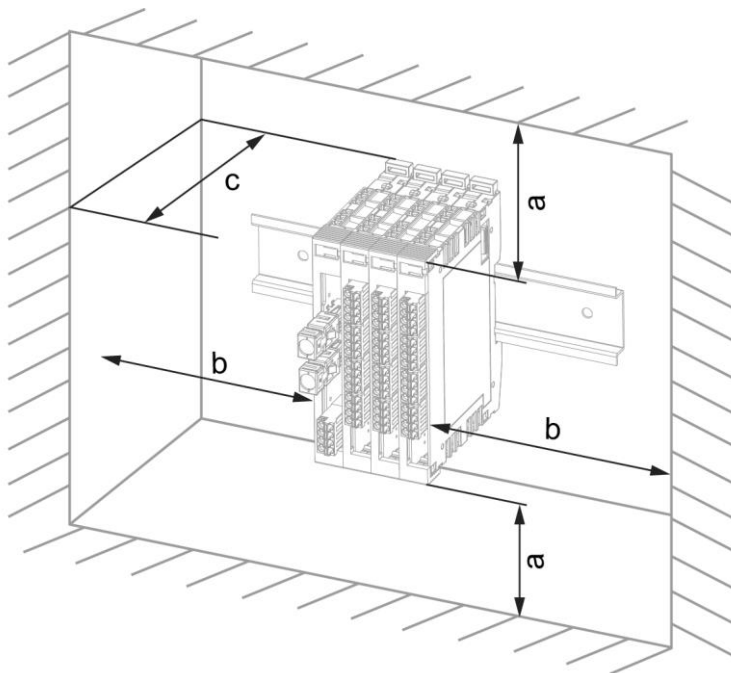

| a | b | c |
|---------------|---------------|----------------|
| 30 mm (1.18") | 30 mm (1.18") | 100 mm (3.94") |

a, b, c ... distances in mm (inches)

6 Addressing

| Address (hex) | Size (bytes) | Access Type | Description | Reset value |
|---------------|--------------|-------------|---|-------------|
| Memory | | | | |
| 0000 | 2 | r | Input register Bit 0 Input 1 Bit 1 Input 2 ... Bit 3 Input 4 Bit 4-7 reserved Bit 8 DC 24V OK Bit 9-15 reserved | 0000 |
| 0000 | 1 | w | Output register Bit 0 Output 1 Bit 1 Output 2 ... Bit 3 Output 4 | 00 |

7 Supported Cycle Times

7.1 Cycle Times below 1 ms (in μs)

| 50 | 100 | 125 | 200 | 250 | 500 |
|----|-----|-----|-----|-----|-----|
| x | x | x | x | x | x |

x= supported

7.2 Cycle Times equal to or higher than 1 ms (in ms)

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 |
|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|----|
| x | x | x | x | x | x | x | x | x | x | x | x | x | x | x | x |

x= supported

| 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 |
|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| x | x | x | x | x | x | x | x | x | x | x | x | x | x | x | x |

x= supported

8 Hardware Class DM081

Hardware Class DM081 for the S-DIAS DM081 digital module

```

SDIAS:43, DM081 (DM081)
[S] Class State (ClassState) <-[]->
[S] Device ID (DeviceID) <-[]->
[S] FPGA Version (FPGAVersion) <-[]->
[S] Hardware Version (HwVersion) <-[]->
[S] Serial Number (SerialNo) <-[]->
[S] Retry Counter (RetryCounter) <-[]->
[O] LED Control (LEDControl) <-[]->
----- Digital Inputs -----
[I] Digital Input 1 (Input1) <-[]->
[I] Digital Input 2 (Input2) <-[]->
[I] Digital Input 3 (Input3) <-[]->
[I] Digital Input 4 (Input4) <-[]->
[I] Input Byte (InputByte) <-[]->
----- Digital Outputs -----
[O] Digital Out 1 (Output1) <-[]->
[O] Digital Out 2 (Output2) <-[]->
[O] Digital Out 3 (Output3) <-[]->
[O] Digital Out 4 (Output4) <-[]->
[O] Output Byte (OutputByte) <-[]->
[S] Voltage OK Output 1-4 (VoltageOk) <-[]->
[ ] ALARM:00, Empty

```

This hardware class is used to control the DM 081 hardware module with 4 digital outputs and digital inputs. More information on the hardware can be found in the module documentation.

8.1 Interfaces

8.1.1 Clients

| | |
|-----------------|---|
| SdiasIn | The client must be connected to an S-DIAS port, an "SdiasOut"_[x]" server. |
| Place | The physical location of the hardware module is entered in this client. Up to 64 modules, 0 to 63, can be assigned. |
| Required | This client is active by default, which means that the S-DIAS hardware module at this position is mandatory for the system and can under no circumstances be disconnected or return an error. Otherwise, the entire hardware deactivated. If the hardware module is missing or removed, an S-DIAS error is triggered. If his client is initialized with 0, the hardware module located in this position is not mandatory. This means that it doesn't have to be available or error-free. However, which components identified as "not required" should be selected with regard to the safety of the system. |

8.1.2 Servers

| | | | | | | | | | |
|---------------------|---|---|--------------------|---|-----------------|---|---------------|---|----------------|
| ClassState | This server shows the actual status of the hardware class. | | | | | | | | |
| DeviceID | The device ID of the hardware module is shown in this server. | | | | | | | | |
| FPGAVersion | FPGA version of the module in 16#XY (e.g. 16#10 = version 1.0). | | | | | | | | |
| SerialNo | The serial number of the hardware module is shown in this server. | | | | | | | | |
| RetryCounter | This server increments when a transfer fails. | | | | | | | | |
| LEDControl | <p>With this server, the application LED of the S-DIAS module can be activated to find the module in the network more quickly. The following statuses are possible:</p> <table border="1" data-bbox="380 861 985 997"> <tr> <td>0</td> <td>LED off</td> </tr> <tr> <td>1</td> <td>LED on</td> </tr> <tr> <td>2</td> <td>Blinks slowly</td> </tr> <tr> <td>3</td> <td>Blinks rapidly</td> </tr> </table> | 0 | LED off | 1 | LED on | 2 | Blinks slowly | 3 | Blinks rapidly |
| 0 | LED off | | | | | | | | |
| 1 | LED on | | | | | | | | |
| 2 | Blinks slowly | | | | | | | | |
| 3 | Blinks rapidly | | | | | | | | |
| Input[1-4] | Status of input 1-4 | | | | | | | | |
| Output[1-4] | Output 1-4, Output set via the write() method. | | | | | | | | |
| InputByte | In this server, the digital outputs are shown in an 8-bit field. Within this bit field, 0 to 3 are allocated to inputs input1 to input4 | | | | | | | | |
| OutputByte | In this server, the digital outputs are shown in a 8-bit field. In this word, bits 0 to 3 are allocated to output1 to output4. A write() instruction to this server writes the bit pattern to these outputs. | | | | | | | | |
| VoltageOk | <table border="1" data-bbox="380 1220 985 1292"> <tr> <td>0</td> <td>power supply error</td> </tr> <tr> <td>1</td> <td>power supply ok</td> </tr> </table> <p>Bank1: for outputs 1-4</p> | 0 | power supply error | 1 | power supply ok | | | | |
| 0 | power supply error | | | | | | | | |
| 1 | power supply ok | | | | | | | | |

8.1.3 Communication Interfaces

| | | |
|--------------|----------|---|
| ALARM | Downlink | With this downlink the corresponding alarm class can be placed via the hardware editor. |
|--------------|----------|---|

8.2 Example

| | |
|---------------------|--------------------|
| VaranManager_2 | |
| VaranManager_21 | |
| To_HwControl | Control |
| 0 | 0 |
| VaranManagerTime | State |
| 1000000 | _ClassOk |
| VaranManagerNr | ManagerOn |
| 0 | 0 |
| PreventManagerError | Release |
| 0 | 16#00000017 |
| IsStartPoint | RetryCounter |
| 0 | 0 |
| RQTaskTime | IsoVaranTime |
| 0 | 12080 |
| IsAlsoClient | AsyVaranTime |
| 0 | 0 |
| SuperiorSystemTime | Act_RTime |
| 0 | 25 |
| SafetyIsoMemRead | Min_RTime |
| 0 | 11 |
| SafetyIsoMemWrite | Max_RTime |
| 0 | 105 |
| SafetyAsyMemRead | Act_RTCallTime |
| 0 | 999 |
| SafetyAsyMemWrite | Min_RTCallTime |
| 0 | 982 |
| PayloadFrame | Max_RTCallTime |
| 0 | 1016 |
| PayloadMEMWrite | SuperiorSystemOK |
| 0 | -1 |
| PayloadMEMRead | VaranOut_1 |
| 0 | 0 |
| | VaranOut_2 |
| | 0 |
| | SafetyMemState |
| | _NOT_ACTIVE |
| | SafetyIsoRdMemUsed |
| | 0 |
| | SafetyIsoWrMemUsed |
| | 0 |
| | SafetyAsyRdMemUsed |
| | 0 |
| | SafetyAsyWrMemUsed |
| | 0 |

| | |
|------------------|-------------------|
| V021 | |
| V0211 | |
| VaranIn | State |
| 0 | _ClassOk |
| Required | Online |
| 1 | 1 |
| UserActon | Release |
| 0 | 16#00000013 |
| SerNo Validation | DeviceAddress |
| 0 | 16#00010000 |
| Transparent | VendorID |
| 0 | 1 |
| | DeviceID |
| | 1187 |
| | SerialNo |
| | "02992298" |
| | RetryCounter |
| | 0 |
| | ValidateSerNo |
| | -2 |
| | FirmwareVersion |
| | 16#00000100 |
| | SdiasState |
| | _ClassOk |
| | SdiasRetryCounter |
| | 0 |
| | SdiasOut_1 |
| | 0 |
| | VaranOut |
| | 0 |

| | |
|----------|-----------------|
| DM081 | |
| DM0811 | |
| SdiasIn | ClassState |
| 0 | _ClassOk |
| Place | DeviceID |
| 0 | 1028 |
| Required | FPGAVersion |
| 1 | 16#000000F2 |
| | SerialNo |
| | "0815" |
| | RetryCounter |
| | 0 |
| | LEDControl |
| | 0 |
| | Input1 |
| | 0 |
| | Input2 |
| | 1 |
| | Input3 |
| | 1 |
| | Input4 |
| | 0 |
| | Output1 |
| | 0 |
| | Output2 |
| | 1 |
| | Output3 |
| | 1 |
| | Output4 |
| | 0 |
| | InputByte |
| | 2#0000000000... |
| | OutputByte |
| | 2#0000000000... |
| | VoltageOk |
| | 1 |

Documentation Changes

| Change date | Affected page(s) | Chapter | Note |
|-------------|------------------|---|---|
| 01.04.2014 | 10 | 5 Mounting | Text updated |
| 30.01.2015 | 9 | 4.2 Note | Added note concerning connecting the S-DIAS module while voltage is applied |
| 26.03.2015 | 7 | 3.2 Applicable Connectors | Added connections |
| 21.01.2016 | 4 | 1.5 Miscellaneous | Standard changed |
| 25.01.2016 | 3 | 1.3 Electrical Requirements | Graphic changed |
| 28.04.2016 | 12 | 5 Mounting | Graphics distances |
| 17.08.2017 | 5 8 | 1.6 Environmental Conditions 3.2 Applicable Connectors | Pollution Degree Sleeve length added Added info regarding ultrasonically welded strands |
| 18.10.2017 | 9 13 | 3.3 Label Field 5 Mounting | Added chapter Graphic replaced |
| 26.09.2019 | 7 | 3 Connector Layout | Graphics extended, note added |
| 14.11.2019 | 16 | 7 Supported Cycle Times | Chapter added |
| 28.02.2020 | 16 | 7 Supported Cycle Times | Text adapted |
| 08.09.2020 | 17 | 8 Hardware Class DM081 | Chapter added |
| 04.11.2020 | 13 | 5 Mounting | Expansion functional ground connection |
| 30.08.2021 | 4 | 1.1 Digital Input Specifications | Signal level and Switching threshold |
| 23.12.2021 | 4 | 1.2 Digital Output Specifications | Delay values changed |

