


S-DIAS Splitter VARAN SV 141

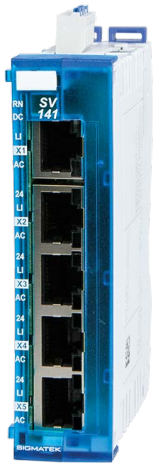

with 1 VARAN In
4 VARAN Out

With its four VARAN Out ports, the VARAN SV 141 S-DIAS splitter module allows a VARAN bus system to be configured in a tree structure.

The VARAN Out ports have a +24 V supply for the VARAN bus, which can be switched via the software. With this supply, special VARAN peripheral devices can be connected to the SV 141 and supplied with +24 V without an additional power cable.

Environmental Conditions

Storage temperature	-20 ... +85 °C	
Environmental temperature	0 ... +50 °C	
Humidity	0-95 %, non-condensing	
Operating conditions	pollution degree 2 altitude up to 2000 m	
EMC resistance	in accordance with EN 61000-6-2 (industrial area)	
EMC noise generation	in accordance with EN 61000-6-4 (industrial area)	
Vibration resistance	EN 60068-2-6	3,5 mm from 5-8,4 Hz 1 g from 8,4-150 Hz
Shock resistance	EN 60068-2-27	15 g
Protection type	EN 60529	IP20

Performance Data

Interfaces	1x VARAN In (RJ45) 4x VARAN Out (RJ45), +24 V switchable over VARAN, 500 mA per port (of which 1x Ethernet (Vte) or real-time Ethernet optional)
------------	--

Electrical Requirements

Supply voltage	18-30 V DC
Current consumption of +24 V power supply	typically 0.25 A internal electronics supply VARAN Out port load (maximum 2 A)

Article Number and Miscellaneous

Article number	20-023-141
Dimensions	25 x 104.2 x 72 mm (W x H x D)
Standard	UL 508 (E247993)
Approvals	UL, cUL, CE